



- ⦿ ***Super Slim***
- ⦿ ***Super Lightweight***
- ⦿ ***Budget friendly***




- **Cabinet size:**

500x500mm 500x1000mm are both available.



Seamless and mixed installation.

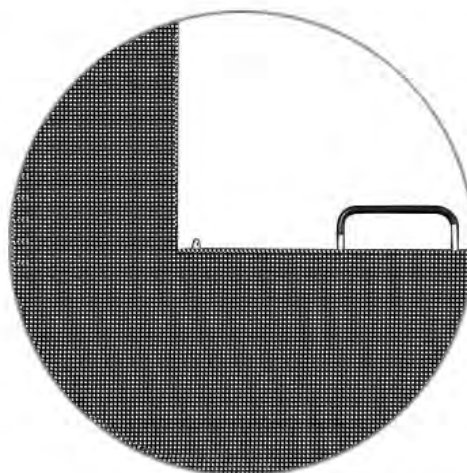

- **Fast & Seamless assembly by hand without tools**



- Stacking and Hanging Installation are Available




Hanging Installation




Stacking Installation

- Easy concave and convex for curve installation (LO 4 , LO 5 , LO 6)

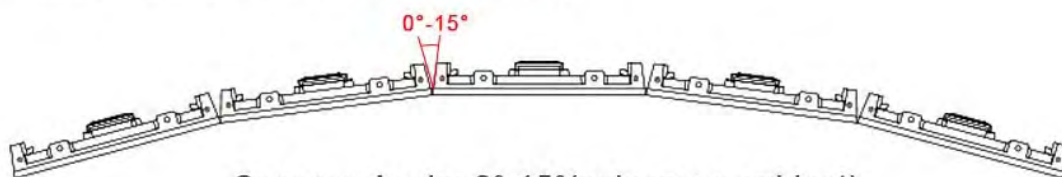

Concave Angle: 0°-15°(only curve cabinet).

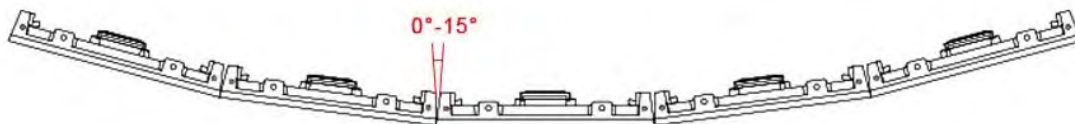

Convex Angle: 0°-15°(only curve cabinet).



Item	LO 3	LO 4	LO 5	LO 6
Pixel pitch	3.91 mm	4.81 mm	5.95 mm	6.25 mm
LED type	SMD 1921	SMD2727	SMD3535 / 2727	SMD3535
Module size	250x250mm	250x250mm	250x250mm	250x250mm
Module resolution	64x64	52x52	42x42	40x40
Cabinet resolution	128x128 / 128x256	104x104 / 104x208	84x84 / 84x168	80x80 / 80x160
Cabinet size(W x H)	500x500mm / 500x1000mm	500x500mm / 500x1000mm	500x500mm / 500x1000mm	500x500mm / 500x1000mm
Density	65,536 dots/m ²	43,264 dots/m ²	28,224 dots/m ²	25,600 dots/m ²
Brightness	≥4200 NIT	≥5000 NIT	≥6000 NIT	≥5000 NIT
Scan	1/16	1/13	1/7	1/10
Max power consumption	730 W/m ²	720 W/m ²	780 W/m ²	580 W/m ²
Ave power consumption	220W/m ²	220W/m ²	250W/m ²	210W/m ²
Cabinet weight	8.5 KG / 16KG	8.5 KG / 16KG	8.5 KG / 16KG	8.5 KG / 16KG
Refresh rate	≥1920Hz	≥1920Hz	≥1920Hz	≥1920Hz
View angle(Horizontal/Vertical)	140°/140°	140°/140°	140°/140°	140°/140°
Working voltage	AC 200~240v 50-60Hz	AC 200~240v 50-60Hz	AC 110v/220v 50-60Hz	AC 200~240v 50-60Hz
Operation temperature	-20°C ~ +50°C	-20°C ~ +50°C	-20°C ~ +50°C	-20°C ~ +50°C
Operation Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
Protection level	IP65/IP54	IP65/IP54	IP65/IP54	IP65/IP54